

# Managing and Orchestrating Docker Containers with OpenShift

Neale Ferguson  
Sine Nomine  
Associates

# Things You Need to Know

- There is a lot of material in these slides
- Far more than can be covered in 1 hour
- Provided as reference so you can explore more deeply
- I will highlight things I believe you need to understand
- Emphasis will be on showing it in action
- A whitepaper/red-piece is under construction

# Preface

- Examples built and run using ClefOS 7.5.1804
  - CentOS Clone with name change
  - Available for z Systems
- However, as we will see this is irrelevant
- All OpenShift Origin containers are available on dockerhub under the clefos repository:  
<https://hub.docker.com/u/clefos/dashboard/>

# Docker – underlying technologies

# Things You Need to Know

- Docker and other container-based technologies rely on Linux kernel APIs to provide isolation and infrastructure
  - Cgroups
  - Copy-on-write
- A daemon is responsible for doing the work via a set of APIs (OCI-compliant)
- Storage is ephemeral unless otherwise specified

Skip

# What is Docker

- An open source project to pack, ship and run any application as a lightweight container
- Container: self-contained receptacle
  - Filesystem
  - Apps
  - Static data
  - Network

Skip

# cgroups...

- A kernel feature that limits, accounts for, and isolates the resource of a collection of processes
- Similar to processes:
  - They are hierarchical
  - Child cgroups inherit certain attributes from their parent cgroup
- Difference: multiple cgroup hierarchies

## ...cgroups...

- Can span multiple “subsystems”
  - blkio —sets limits on input/output access to and from block
  - cpu —uses the scheduler to provide cgroup tasks access to the CPU
  - cpuacct —generates automatic reports on CPU resources used by tasks in a cgroup.



## ...cgroups...

- Can span multiple “subsystems”
  - cgroup —assigns individual CPUs (on a multicore system) and memory
  - devices —allows or denies access to devices by tasks in a cgroup
  - freezer —suspends or resumes tasks in a cgroup

## ...cgroups...

- Can span multiple “subsystems”
  - memory —sets limits on memory use by tasks in a cgroup, & generates automatic reports on memory
  - net\_cls —tags network packets with a class identifier (classid) that allows the Linux traffic controller (tc) to identify packets originating from a particular cgroup task.

## ...cgroups...

- Can span multiple “subsystems”
  - net\_prio —provides a way to dynamically set the priority of network traffic per network interface
  - ns — the namespace subsystem

# Namespaces...

- CLONE\_NEWIPC: IPC Namespaces: SystemV IPC and POSIX Message Queues can be isolated.
- CLONE\_NEWPID: PID Namespaces: PIDs are isolated, meaning that a virtual PID inside of the namespace can conflict with a PID outside of the namespace. PIDs inside the namespace will be mapped to other PIDs outside of the namespace. The first PID inside the namespace will be '1' which outside of the namespace is assigned to init

# ...Namespaces...

- CLONE\_NEWNET: Network Namespaces: Networking (/proc/net, IPs, interfaces and routes) are isolated. Services can be run on the same ports within namespaces, and "duplicate" virtual interfaces can be created.
- CLONE\_NEWNS: Mount Namespaces. We have the ability to isolate mount points as they appear to processes. Using mount namespaces, we can achieve similar functionality to chroot() however with improved security.

# ...Namespaces

- CLONE\_NEWUTS: UTS Namespaces. This namespaces primary purpose is to isolate the hostname and NIS name.
- CLONE\_NEWUSER: User Namespaces. Here, user and group IDs are different inside and outside of namespaces and can be duplicated.

# Copy-on-Write

- Allows Docker to instantiate containers very quickly
- Instead of having to make full copies of the which files comprise a container, it can use “pointers” back to existing files
- Containers are easily “linked” (or “stacked” or “layered”) to other containers

# Docker Registry (optional)

- A stateless, highly scalable server-side application that stores and distributes Docker images
- Enables:
  - Tight control where images are stored
  - Full ownership of distribution pipeline
  - Integration of image storage & distribution into an in-house development workflow



# Docker Daemon

- Manages containers
  - Creates volumes
  - Starts/stops containers

```
docker daemon -H tcp://0.0.0.0:4243 -H  
unix:///var/run/docker.sock
```

OR

```
systemctl enable docker  
systemctl start docker
```

# Docker – Building Containers

# Things You Need to Know

- Everything starts with a base image
- Dockerfiles are text files with recipes for building images based on another image
- Images are held in a registry
- Dockerhub is the public repository
- There are official images that you can trust
- Otherwise... Buyer beware
- Images are run in containers which may be linked or grouped

Skip

# Creating a Starter System

- Base image: containers built from it or descendants
- Create a chroot-like environment
  - File system including /dev
  - yum install packages
  - Trim unwanted stuff
  - Create tar ball
  - Import to Docker
- “Official Images” – Those accepted by Docker
  - ClefOS is now an official image

# The Dockerfile

- A recipe for building a container
- Build from an existing container
- Install requirements
- Define network and volume requirements
- Specify command to run on startup

```
FROM      clefos:clefos7

MAINTAINER The ClefOS Project <neale@sinenomine.net>
LABEL     Vendor="ClefOS" License="GPLv2" Version="8.0-10.1"

COPY      ibm-java-sdk-8.0-1.10-s390x-archive.bin java.rsp dummy-java-1.8-0.el7.noarch.rpm /

RUN       yum install -y tar zip && \
          mkdir -p /opt/ibm && \
          echo "Installing IBM JDK" && \
          /ibm-java-sdk-8.0-1.10-s390x-archive.bin -f /java.rsp -i silent && \
          yum install -y dummy-java-1.8-0.el7.noarch.rpm && \
          yum erase -y tar zip vim-minimal && \
          yum clean all && \
          rm -f /*.rpm /java.rsp /*.bin

ENV       JAVA_HOME=/opt/ibm/java PATH=$JAVA_HOME/bin:$PATH
```

```
FROM clefos/nodejs
MAINTAINER The ClefOS project <neale@sinenomine.net>
ADD epel.repo /etc/yum.repos.d/epel.repo
RUN yum install -y git tar gcc gcc-c++ make mongodb mongodb-server \
    mongo-tools krb5-devel perl-Digest-SHA && \
    npm install -g express && \
    npm install -g mongodb && \
    npm install -g tar mkdirp

WORKDIR /mean
EXPOSE 27017 28017
VOLUME /mongodb/data
RUN echo "mongod --fork --logpath /mongodb/data/log/mongod.log \
    --dbpath /mongodb/data --smallfiles --noprealloc --httpinterface --rest
\
    > /start.sh && echo "node \$1" >> /start.sh && \
    yum erase -y git tar gcc gcc-c++ make perl-Digest-SHA && \
    rm -f /etc/yum.repos.d/epel.repo && \
    rm -rf /tmp/* /var/cache/yum/* /root/* /root/.[a-zA-Z0-9]* /src
ENV NODE_PATH=/opt/ibm/nodejs/lib/node_modules:/mean/node_modules
ENTRYPOINT ["sh", "/start.sh"]
```

# Building Images

- Each step corresponds to a layer
- Stop build at one point
- Rebuild starts from last change



# Managing Images

```
[root@docker docker]# docker images
REPOSITORY          TAG          IMAGE ID      CREATED       VIRTUAL
SIZE
sinenomine/fluentd-s390x    latest    b3e3d646f313  4 days ago   515.2 MB
sinenomine/amhub-s390x     latest    76a2c4a387f0  7 days ago   795 MB
sinenomine/ade-s390x       latest    5dc6c7c6191c  5 weeks ago  645.8 MB
sinenomine/compose-ui-s390x latest    ff5b9eda68ec  8 weeks ago  315.9 MB
sinenomine/nginx-1.8-s390x latest    4f87e1292531  8 weeks ago  211 MB
sinenomine/clefos71-base-s390x latest    60ef3a8ba174  3 months ago 110.5 MB
clefos-base-s390x         latest    60ef3a8ba174  3 months ago 110.5 MB
sinenomine/clefos71-nodejs-s390x latest    d76f12128dde  5 months ago 548.7 MB
sinenomine/mariadb-5.5-s390x latest    91233ea5a5c1  5 months ago 311.3 MB
sinenomine/clefos71-java-s390x latest    3cb8ef8fd562  5 months ago 480.2 MB
```





# Making Images Available

```
[root@docker ~]# docker push sinenomine/fluentd-s390x:latest
The push refers to a repository [docker.io/sinenomine/fluentd-s390x] (len: 1)
b3e3d646f313: Pushed
1b11901fbeat: Pushed
5f6ab7c78e8b: Pushed
288d092713a6: Pushed
f86e5eb99f4b: Pushed
:
d69fc3fad8fa: Pushed
732e18ef67b6: Pushed
7196f6de1451: Pushed
7118afa06d84: Pushed
ec3ec425b681: Pushed
60ef3a8ba174: Pushed
latest: digest:
sha256:120519d3d8f0cf00a0caddb3fd8c0c6148b8145dbf6fed2897b36e965d35424d size:
29665
```

# Dockerhub

## Repositories

Type to filter repositories by name

 <a href="#">sinomine/examplevotingapp_result</a> public	0 STARS	200 PULLS	> DETAILS
 <a href="#">sinomine/clefos-base-s390x</a> public	0 STARS	182 PULLS	> DETAILS
 <a href="#">sinomine/hello-openshift</a> public	0 STARS	180 PULLS	> DETAILS
 <a href="#">sinomine/examplevotingapp_vote</a> public	0 STARS	164 PULLS	> DETAILS

# Running Containers

- Persistent data goes to [a] volume[s]
- Run a standalone container
  - All functionality within the container
- Run a “swarm” of containers
  - Typically database server
  - Web server
  - Application server

# Running Containers

- `docker run --name=mariadb -v /var/local/mariadb:/var/lib/mysql -d -p 3306:3306 -e MYSQL_ROOT_PASSWORD=password sinenomine/mariadb-5.5-s390x:latest mysqld_safe --connect-timeout=30`
- `docker run --rm -i -t --name=ade -p 8022:22 --link=mariadb -v /var/local/ade:/var/local/ade -e MARIADB_ROOT_PASSWORD=password -e MARIADB_ADE_PASSWORD=password sinenomine/ade-s390x`

# Running Containers

- Containers run as daemons or interactively
- Multiple containers wanting to use same port?
  - Docker can remap:  
-p <host port>:<container port>

# Running Containers

- What about environment variables?
  - -e option
  - Dockerfile
- What is my container doing:
  - docker top <image id>
  - top
- What is my container config?
- docker inspect <image>

```
"Networks": {  
  "bridge": {  
    "EndpointID":  
"0448a9a68ed5a9c5f89435b3d62d78bbc42d4f601a25e65b2e149ed8f694993c",  
    "Gateway": "172.18.0.1",  
    "IPAddress": "172.18.0.3",  
    "IPPrefixLen": 16,  
    "IPv6Gateway": "",  
    "GlobalIPv6Address": "",  
    "GlobalIPv6PrefixLen": 0,  
    "MacAddress": "02:42:ac:12:00:03"  
  }  
}
```



# Running Containers

- Command line
  - docker run
  - kubernetes
- GUIs
  - Compose-UI
  - AMHub
  - **OpenShift**
- Images are automatically downloaded

# Running Containers

- Build on ClefOS / Run on Ubuntu
- Build on ClefOS / Build upon image on Ubuntu
- Builders meet all pre-requisites
- Self-contain requirements
  - No conflicts with other containers
  - Unlike multi-tenancy apps

# Openshift Origin - Introduction

Next slides are derived from <https://docs.openshift.org/latest/architecture>

# Things You Need to Know

- OpenShift is a layer on top of Kubernetes
  - OS v3.xx based on K8 v1.xx
- K8 is a manager of containerized apps across a set of containers and/or hosts
- Concepts of master node, infrastructure node, and compute node
- Provides registry, router, users, groups, projects, builds, templates
- Installs via ansible playbooks which takes care of a lot of the minutiae

# What is OpenShift?



- OpenShift is a layer on top of:
  - Docker provides the abstraction for Linux-based lightweight container images
  - Kubernetes provides cluster management & orchestrates containers on multiple hosts
- OpenShift Origin is the Community Edition

# Kubernetes

- Manages containerized applications across a set of containers or hosts
- Provides mechanisms for deployment, maintenance, and application-scaling

# Kubernetes Components


Component	Description
API Server	Validates and configures the data for pods, services, and replication controllers. It also assigns pods to nodes and synchronizes pod information with service configuration
etcd	Stores the persistent master state while other components watch etcd for changes to bring themselves into the desired state
Controller Manager	Watches etcd for changes to replication controller objects and then uses the API to enforce the desired state
HAProxy	Option to balance load between API master endpoints.

# What is OpenShift



- OpenShift Origin adds:
  - Source code management, builds, and deployments for developers
  - Managing and promoting images at scale as they flow through your system
  - Application management at scale
  - Team and user tracking for organizing a large developer organization
  - Networking infrastructure that supports the cluster



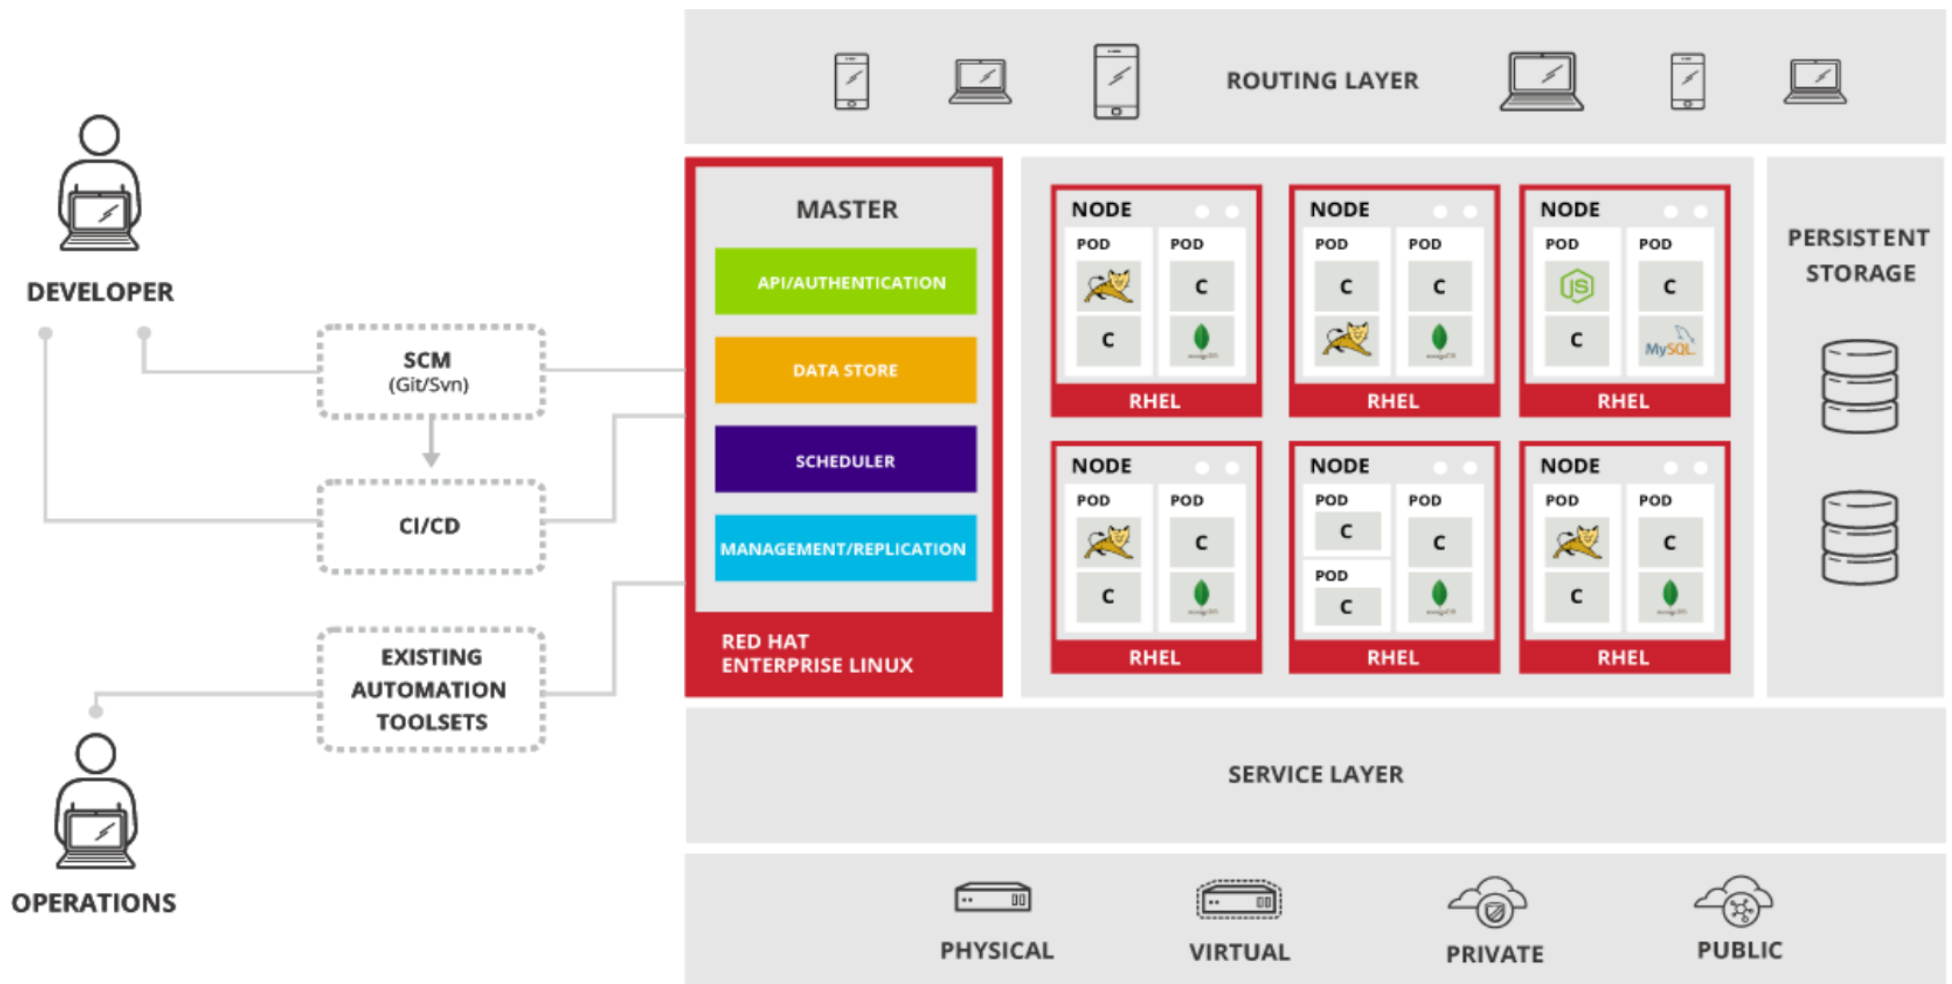

# OpenShift Core

- Containers & images are the building blocks for deploying applications
- Pods & services allow for containers to communicate with each other and proxy connections
- Projects and users provide the space and means for communities to organize and manage their content together


# OpenShift Core

- Builds & image streams allow you to build working images and react to new images
- Deployments add expanded support for the development and deployment lifecycle
- Routes announce your service to the world
- Templates allow for many objects to be created at once based on customized parameters.

# OpenShift Registries

- A service for storing and retrieving Docker-formatted container images
- A registry contains a collection of one or more image repositories
- Each image repository contains one or more tagged images

# OpenShift Registries

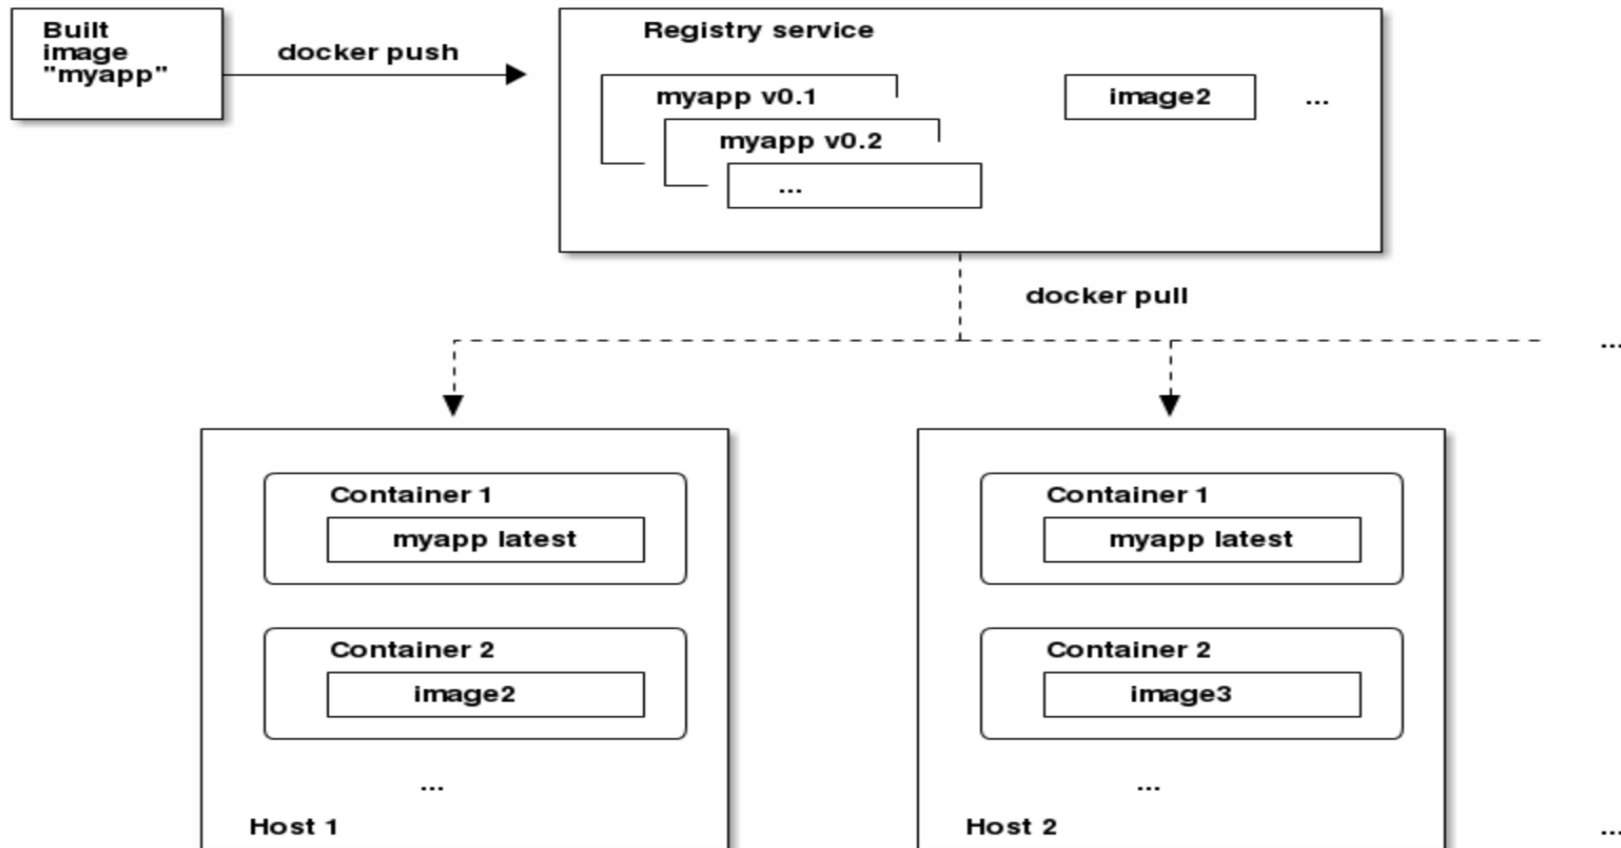

# OpenShift Pods

- One or more containers deployed together on one host
- The smallest compute unit that can be defined, deployed, and managed.
- Rough equivalent of a machine instance to a container
- Each pod is allocated its own internal IP address

# OpenShift Pods

- Containers within pods can share their local storage and networking.
- Pods have a lifecycle: they are defined, assigned to run on a node, then run until their container(s) exit or are Largely immutable: changes cannot be made to a pod definition while it is running
- Changes result in termination & recreation

# OpenShift Users

- Interaction with OpenShift Origin is associated with a user
- Users may be placed into groups
- A user object represents an actor which may be granted permissions in the system by adding roles to them or to their groups:
  - Regular Users
  - System Users
  - Service Accounts



# OpenShift Projects

- A Kubernetes namespace with additional annotations,
- The central vehicle by which access to resources for regular users is managed
- Allows a community of users to organize and manage their content in isolation from other communities.
- Users must be given access to projects by administrators

# OpenShift Builds

- A build is the process of transforming input parameters into a resulting object.
- Transform input parameters or source code into a runnable image
- A BuildConfig object is the definition of the entire build process.
- OpenShift Origin creates Docker-formatted containers from build images and pushing them to a container registry

# OpenShift Persistent Storage



- Pods may run on any node
  - Local storage insufficient
- NFS, AWS, iSCSI, GlusterFS, CephFS, or SCSI (zFCP) [and more]
- Kubernetes < 1.8 (OpenShift < 3.8) has limitation for SCSI

# OpenShift Replication and Jobs



- Replication Controllers
  - Ensures that a specified number of replicas of a pod are running at all times
- Jobs
  - Similar to replications but designed for one-time pods

# OpenShift Deployments

- Provides the ability to transition from an existing deployment of an image to a new one
- Defines hooks to be run before or after creating the replication controller
- When triggered a deployer-pod manages the deployment including scaling down the old replication controller, scaling up the new one, and running hooks
- Triggers may include such things such as a new image becoming available

# OpenShift Templates

- Describe a set of objects that can be parameterized and processed to produce a list of objects for creation by OpenShift Origin
- The objects to create can include anything that users have permission to create within a project, e.g. services, build configurations, and deployment configurations.
- May also define a set of labels to apply to every object defined in the template

# OpenShift Origin – Demonstration

# Things You Need to Know


- Demo system is an “all-in-one”
  - 1 virtual machine running
    - Master
    - Infrastructure
    - Compute
- Live demos are unpredictable
- Point your browsers to <https://okcd-master.sinenomine.net:8443>
  - sna/test or admin/sna




# Demo Time

- Using the GUI
- Using the CLI
- Examining the registry
- Simple on pod application
- Source-to-Image application (MLB)
  - JBOSS (Wildfly) & MongoDB
- Orchestration of multiple pods
  - Spark, Hadoop, & Zeppelin

# MLB

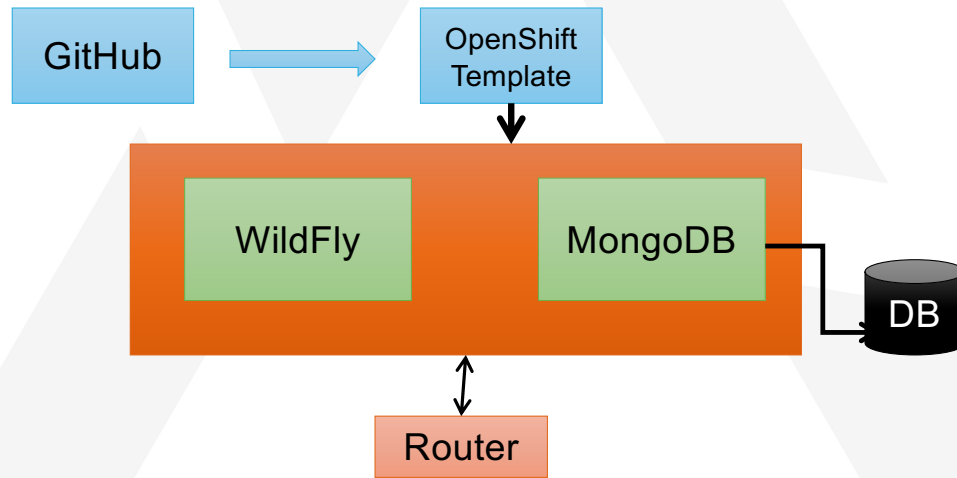

# Spark

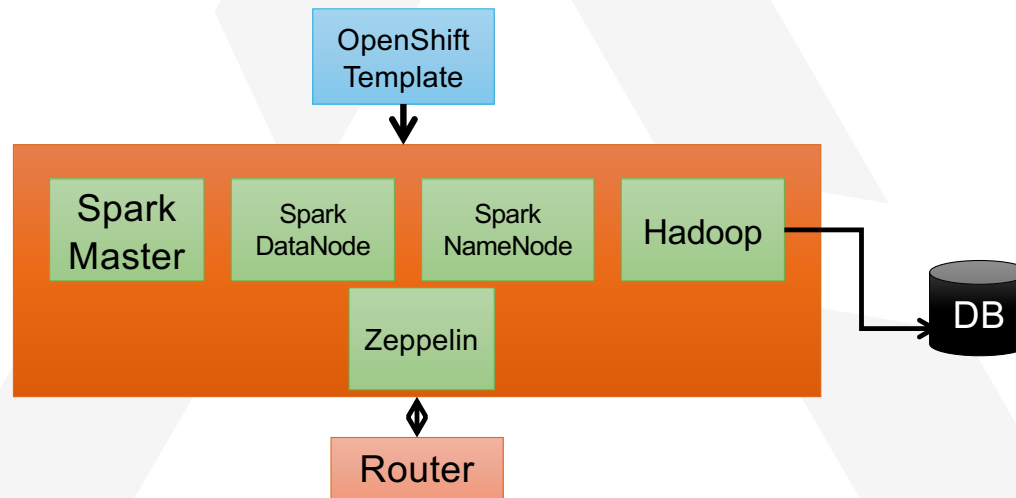

**OPENSIFT** ORIGIN

OPENSIFT **origin**

Username

Password

Welcome to OpenShift Origin.

[Log In](#)

## Projects

Sort by

Display Name 



**New Project**

**sinnomine**

created by sinnomine 10 minutes ago



Project **sinenomine** ▼ Add to project ? sinenomine ▼

**Overview**

**Applications** >

**Builds** >

**Resources** >

**Storage**

**Monitoring**

Get started with your project.

Use your source or an example repository to build an application image, or add components like databases and message queues.

**Add to Project**

[sinenomine](#) » Add to Project

[Browse Catalog](#)

Deploy Image

Import YAML / JSON

No images or templates.

No images or templates are loaded for this project or the shared [openshift](#) namespace. An image or template is required to add content.

To add an image stream or template from a file, use the editor in the **Import YAML / JSON** tab, or run the following command:

```
oc create -f <filename> -n sinenomine
```




[Back to overview](#)

[sinenomine](#) » Add to Project

[Browse Catalog](#) [Deploy Image](#) [Import YAML / JSON](#)

Deploy an existing image from an image stream tag or Docker pull spec.

Image Stream Tag

Namespace	/	Image Stream 	:	Tag 
<ul style="list-style-type: none"><li>openshift</li><li>sinenomine</li></ul>				
Image name or pull spec				



OPENSIFT ORIGIN

sinenomine

Deploy an existing image from an image stream tag or Docker pull spec.

Image Stream Tag

sinenomine / deployment-example : v2

Image Name

Image name or pull spec



deployment-example:v2 19 days ago, 1.8 MiB, 5 layers

- This image will be deployed in Deployment Config **deployment-example**.
- Port 8080/TCP will be load balanced by Service **deployment-example**.  
Other containers can access this service through the hostname **deployment-example**.

\* Name

deployment-example

Identifies the resources created for this image.



Pull Secret

Secret name

Secret for authentication when pulling images from a secured registry. [Learn more](#)

 Deployed image deployment-example to project sinenomine.. [Show details](#) | [Dismiss](#)



▼ DEPLOYMENT EXAMPLE [Create Route](#)


 deployment-example has containers without health checks, which ensure your application is running correctly. [Add health checks](#) 

 deployment-example

Deployment Config [deployment-example](#) - a few seconds ago #1

CONTAINER: DEPLOYMENT-EXAMPLE

 **Image:**  
sinenomine/deployment-example  
 **Ports:** 8080/TCP



No grouped services.  
No services are grouped with [deployment-example](#).

The screenshot displays a Kubernetes dashboard interface. On the left is a dark sidebar with navigation options: Overview, Applications, Builds, Resources, and Storage. The main content area shows a deployment overview with a green checkmark icon and the text "Deployed image hello-openshift to project sinen". Below this, a dropdown menu is open over the "Applications" section, listing "Deployments", "Pods", "NETWORKING", "Services", and "Routes". The main view shows a deployment named "example" with a "1 pod" indicator in a blue circle. The pod details section includes the following information:

- CONTAINER: DEPLOYMENT-EXAMPLE
- Image: sinenomine/deployme-nt-example
- Ports: 8080/TCP

Additional visible text in the background includes "MPLE", "has containers without health checks, v", and "example - 2 minutes ago #1".

**\* Name**

hello-route

A unique name for the route within the project.

**Hostname**

148.100.42.153

Public hostname for the route. If not specified, a hostname is generated. The hostname can't be changed after the route is created.

**Path**

/hello

Path that the router watches to route traffic to the service.

**\* Service**

hello-openshift

Service to route to.

[Split traffic across multiple services](#)

**Target Port**

8080 → 8080 (TCP)

Target port for traffic.

Secure route

Routes can be secured using several TLS termination types for serving certificates.

Create

Cancel


## Routes

Create Route

Filter by label

Add

Name	Hostname	Routes To	Target Port	TLS Termination
<a href="#">deployment</a>	<a href="http://148.100.42.153/deployment">http://148.100.42.153/deployment</a>	<a href="#">deployment-example</a>	8080-tcp	
<a href="#">hello-route</a>	<a href="http://148.100.42.153/hello">http://148.100.42.153/hello</a>	<a href="#">hello-openshift</a>	8080-tcp	



HELLO OPENSIFT

<http://148.100.42.153/hello>



hello-openshift has containers without health checks, which ensure your application is running correctly. [Add health checks](#)

hello-openshift

Deployment Config **hello-openshift** - 5 minutes ago

#1

CONTAINER: HELLO-OPENSIFT




**Image:**

sinenomine/hello-openshift



**Ports:** 8080/TCP , 8888/TCP



No grouped services.

No services are grouped with **hello-openshift**. Add a service to group them together.

[Group Service](#)

```
# docker exec -it origin bash
bash-4.2# oc login
Authentication required for https://148.100.42.153:8443 (openshift)
Username: sinenomine
Password:
Login successful.
```

```
You have one project on this server: "sinenomine"
```

```
Using project "sinenomine".
```

```
bash-4.2# oc status
In project sinenomine on server https://148.100.42.153:8443
```

```
http://148.100.42.153 to pod port 8080-tcp (svc/deployment-example)
  dc/deployment-example deploys istag/deployment-example:v2
  deployment #1 deployed 8 minutes ago - 1 pod
```

```
http://148.100.42.153 to pod port 8080-tcp (svc/hello-openshift)
  dc/hello-openshift deploys istag/hello-openshift:latest
  deployment #1 deployed 6 minutes ago - 6 pods
```



```
# oc get pods
```

NAME	READY	STATUS	RESTARTS	AGE
deployment-example-1-ypclg	1/1	Running	0	32m
hello-openshift-1-b61vl	1/1	Running	0	25m
hello-openshift-1-jqkvb	1/1	Running	0	25m
hello-openshift-1-tu25u	1/1	Running	0	25m
hello-openshift-1-v7ra3	1/1	Running	0	30m
hello-openshift-1-vxss9	1/1	Running	0	25m
hello-openshift-1-yw0z7	1/1	Running	0	25m

```
# oc new-app docker.io/sinenomine/lighttpd-s390x:latest
```

```
--> Found Docker image 3d4758d (3 weeks old) from docker.io for "docker.io/sinenomine/lighttpd-s390x:latest"
```

- \* An image stream will be created as "lighttpd-s390x:latest" that will track this image
- \* This image will be deployed in deployment config "lighttpd-s390x"
- \* Port 8091/tcp will be load balanced by service "lighttpd-s390x"
  - \* Other containers can access this service through the hostname "lighttpd-s390x"
- \* WARNING: Image "docker.io/sinenomine/lighttpd-s390x:latest" runs as the 'root' user which may not be permitted by your cluster administrator

```
--> Creating resources ...
```

```
imagestream "lighttpd-s390x" created  
deploymentconfig "lighttpd-s390x" created  
service "lighttpd-s390x" created
```

```
--> Success
```

```
svc/lighttpd-s390x - 172.30.232.241:8091
```


```
dc/lighttpd-s390x deploys istag/lighttpd-s390x:latest  
deployment #1 deployed 50 seconds ago - 1 pod
```

# Openshift Origin – Mixed Platform Operation

# Things You Need to Know

- Demo system consists of:
  - 1 x86\_64 virtual machine running
    - Master/Infrastructure/Compute
    - Running in SNA DMZ
  - 1 s390x virtual machine running
    - Compute
    - Running on LinuxONE Community Cloud
- Point your browsers to <https://oso-dev-test.svc.sinenomine.net:8443>
  - sna/test or admin/sna

# Mixed Platform Operation

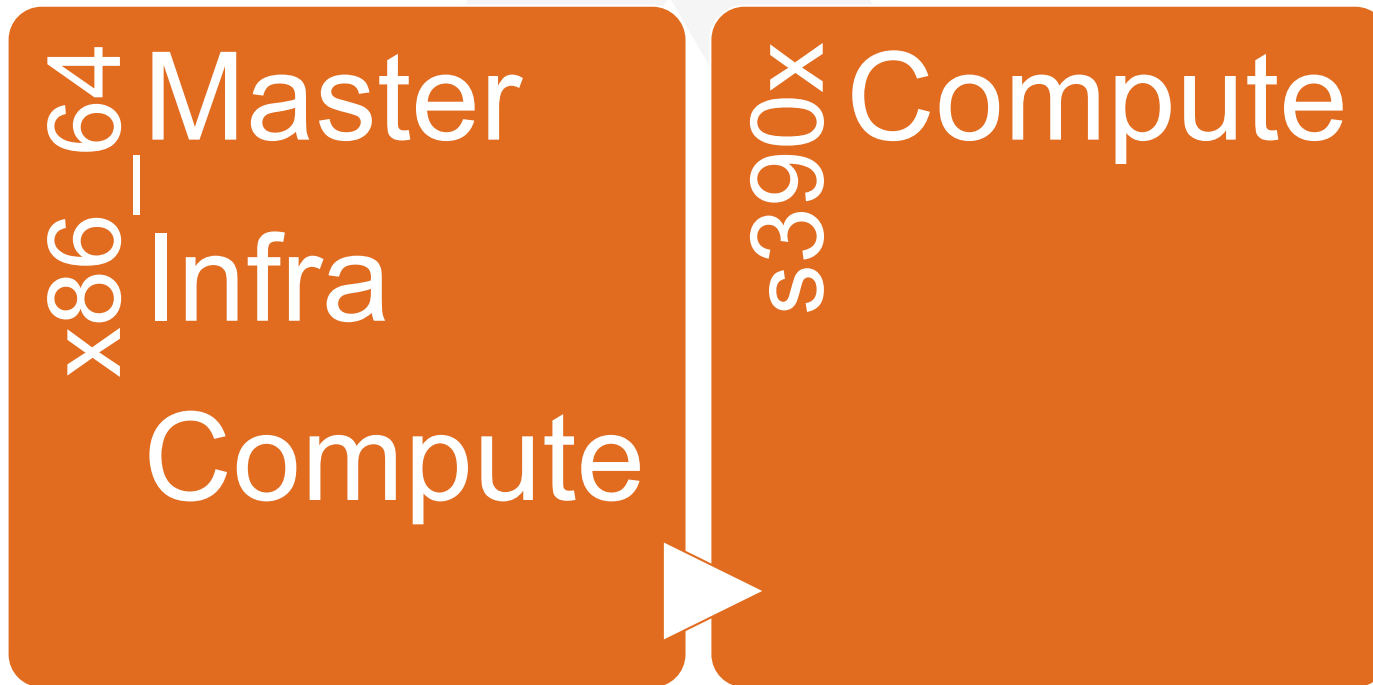

# Mixed Platform Operations

```
# oc label node okcd-node.sinenomine.net arch=s390x

spec:
  replicas: 1
  selector:
    deploymentConfig: ${APPLICATION_NAME}-master
  template:
    :
    spec:
      containers:
        image: docker.io/clefos/spark:2.1.0
        imagePullPolicy: IfNotPresent
        name: ${APPLICATION_NAME}-master
nodeSelector:
  arch: s390x
```

# Mixed Platform Operation

```
# oc describe node
```

```
Name:          oso-dev-test.svc.sinenomine.net
```

```
Roles:         compute,infra,master
```

```
Labels:        beta.kubernetes.io/arch=amd64
```

```
beta.kubernetes.io/os=linux
```

```
kubernetes.io/hostname=oso-dev-test.svc.sinenomine.net
```

```
logging-infra-fluentd=true
```

```
node-role.kubernetes.io/compute=true
```

```
node-role.kubernetes.io/infra=true
```

```
node-role.kubernetes.io/master=true
```

# Mixed Platform Operation

Namespace	Name
default	docker-registry-1-dqlrd
default	registry-console-1-rmzf5
default	router-1-95crd
kube-service-catalog	apiserver-n5s9v
kube-service-catalog	controller-manager-npwp9
kube-system	master-api-oso-dev-test.svc.sinenomine.net
kube-system	master-controllers-oso-dev-test.svc.sinenomine.net
kube-system	master-etcd-oso-dev-test.svc.sinenomine.net
openshift-ansible-service-broker	asb-1-rl6tr
openshift-logging	logging-curator-1-vnjlg
openshift-logging	logging-fluentd-c2jffj
openshift-node	sync-8n4kb
openshift-sdn	ovs-5kdkc
openshift-sdn	sdn-rnmnh
openshift-template-service-broker	apiserver-rq9j2
openshift-web-console	webconsole-57d88df7d9-wgcpw



# Mixed Platform Operation

# oc describe node

Name: okcd-node.sinenomine.net

Roles: compute

**Labels:** arch=s390x

**beta.kubernetes.io/arch=s390x**

beta.kubernetes.io/os=linux

kubernetes.io/hostname=okcd-node.sinenomine.net

logging-infra-fluentd=true

node-role.kubernetes.io/compute=true

Annotations:

node.openshift.io/md5sum=32ae361b122c8a26a133736689eaf26e

volumes.kubernetes.io/controller-managed-attach-detach=true

CreationTimestamp: Tue, 30 Oct 2018 12:16:40 -0400

# Mixed Platform Operation

Namespace

-----

openshift-logging

openshift-node

openshift-sdn

openshift-sdn

**sinenomine**

**sinenomine**

**sinenomine**

**sinenomine**

**sinenomine**

**sinenomine**

**sinenomine**

Name

----

logging-fluentd-2fnt5

sync-ln6t4

ovs-tx1sb

sdn-gq897

**spark-datanode-1-rzpwf**

**spark-master-1-8svnp**

**spark-namenode-1-27jsj**

**spark-ui-proxy-1-99b7x**

**spark-worker-1-pzv98**

**spark-worker-1-vdwmn**

**spark-zepplin-1-ktwqj**